



Solarever USA

Made in North America

Module HC 108


400-410 Watt

Positive power tolerance of 0~+5W
MONO PERC HALF CELL BLACK MODULE



Complete System and Product Certifications

IEC 61215, IEC 61730, IEC61701, UL 61730
ISO9001:2015 : ISO Quality Management System
ISO14001: 2015 : ISO Environment Management System
ISO45001:2018 : Occupational Health and Safety

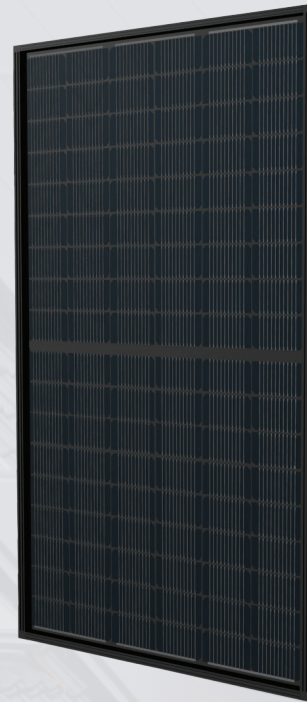

KEY FEATURES



Multi Busbar Solar Cell

Multi busbar solar cell adopts new technology to improve the efficiency of modules, offers a better aesthetic appearance, making it perfect for rooftop installation.



High Efficiency

Higher module conversion efficiency (up to 20.97%) benefit from half cell structure (low resistance characteristic).



PID Resistance

Excellent Anti-PID performance guarantee limited power degradation for mass production.



Low-light Performance

Advanced glass and cell surface textured design ensure excellent performance in low-light environment.



Severe Weather Resilience


Certified to withstand: wind load (5400 Pascal) and snow load (5400 Pascal).



Durability Against Extreme Environmental Conditions

High salt mist and ammonia resistance.

ENGINEERING DRAWINGS

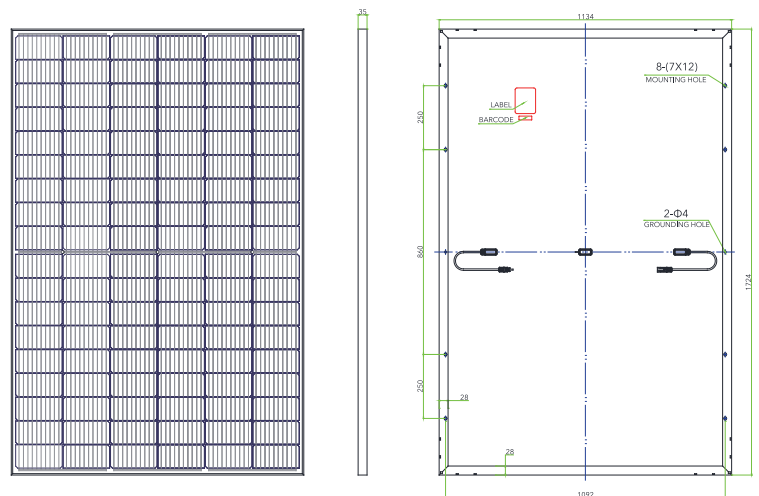


PACKAGING CONFIGURATION

(Two pallets = One stack)

31pcs/pallet , 62pcs/stack, 899pcs/53FT Truck

LINEAR PERFORMANCE WARRANTY


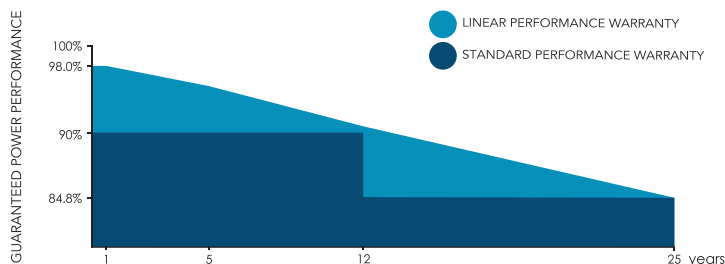


- 25-Year Product Warranty.
- 25-Year Efficiency Power Warranty +85 output.

MECHANICAL CHARACTERISTICS

Cell Type	Mono PERC 182x91mm
No. of Half-cells	108 (6x18)
Dimensions	1724x1134x35mm (67.87x44.64x1.37 inch)
Weight	21.5 kg (47.4 lbs)
Front Glass	3.2mm, Anti-Reflection Coating, High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68 Rated, connector compatible with MC4
Output Cables	TÜV 1x4.0mm 450mm, (-) 1200mm or Customized Length
Fire Rating	UL: Type 1, IEC: Class C
Maximum static load	6 points (fixed) 5400Pa (front side), 5400Pa (back side)
Maximum static load	4 points (fixed) 5400Pa (front side), 2400Pa (back side)

ELECTRICAL PERFORMANCE & TEMPERATURE DEPENDENCE

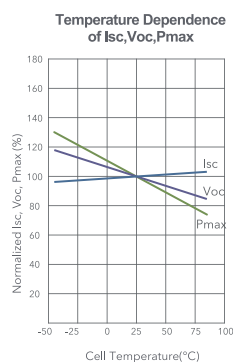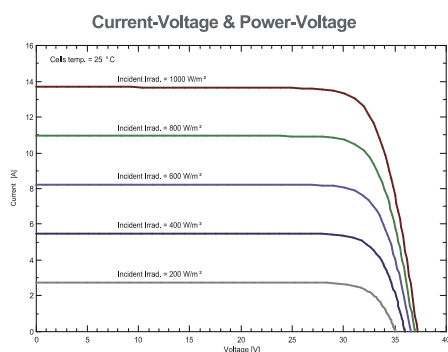

SPECIFICATIONS

Module Type	SE-182*91-400M-108		SE-182*91-405M-108		SE-182*91-410M-108	
	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	400W	300W	405W	304W	410W	308W
Maximum Power Voltage (Vmp)	31.06	28.90	31.21	29.04	31.35	29.20
Maximum Power Current (Imp)	12.88	10.39	12.98	10.47	13.08	10.55
Open-circuit Voltage (Voc)	36.83	35.01	36.98	35.16	37.12	35.29
Short-circuit Current (Isc)	13.76	11.09	13.86	11.18	13.96	11.26
Module Efficiency STC (%)	20.46%		20.72%		20.97%	
Operating Temperature (°C)	-40°C ~+85°C					
Maximum System Voltage	1500VDC (IEC)					
Maximum Series Fuse Rating	25A					
Power Tolerance	0~+3%					
Temperature Coefficients of Pmax	-0.35%/°C					
Temperature Coefficients of Voc	-0.29%/°C					
Temperature Coefficients of Isc	0.048%/°C					
Nominal Operating Cell Temperature (NOCT)	45±2°C					

STC: ☀ Irradiance 1000W/m²

🌡 Cell Temperature 25°C

☁ AM=1.5

NOCT: ☀ Irradiance 800W/m²

🌡 Ambient Temperature 20°C

☁ AM=1.5

🌀 Wind Speed 1m/s

*Power measurement tolerance: ± 3%

Contact us!

Become the best solar company for the world +1(956) 962 2969 accounts@solareverusa.com